







SURFACE MOUNT LED DOWNLIGHT

High-grade diecast alloy housing
COB/SMD LED technology for superior light output
Quality downlight that is easy to install
especially on hard to cut surfaces like concrete ceilings

SURFACE MOUNT HIGH LUMEN COB LED DOWNLIGHT

Features



Item	AS-D1220
Consumption	20W
LED type	COB LED
Luminosity	1800lm
Colour temperature	3000K/4000K/6000K
Dimmable	Yes / no
Size	Ø120x110mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V, 50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.5
IP Class	IP20
Colours	White / Black



Features



Item	AS-D1430
Consumption	30W
LED type	COB LED
Luminosity	2700lm
Colour temperature	3000K/4000K/6000K
Dimmable	Yes / no
Size	Ø140x130mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V, 50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.9
IP Class	IP20
Colours	White / Black

SMD LED DOWNLIGHT

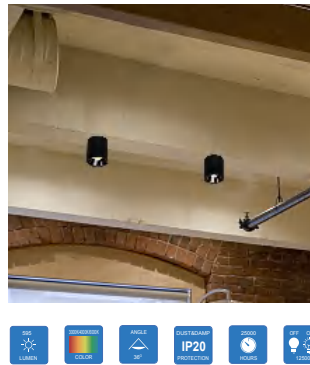



Features

Item	AS-D7007
Consumption	7W
LED type	SMD LED
Luminosity	595lm
Colour temperature	3000K/4000K/6000K
Dimmable	Yes / no
Size	Ø70x75mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V, 50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.5
IP Class	IP20
Colours	White / Black

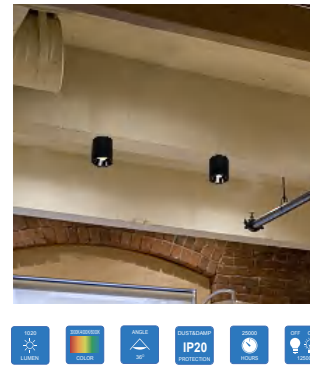



Features

Item	AS-D9012
Consumption	12W
LED type	SMD LED
Luminosity	1020lm
Colour temperature	3000K/4000K/6000K
Dimmable	Yes / no
Size	Ø90x90mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V, 50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.5
IP Class	IP20
Colours	White / Black

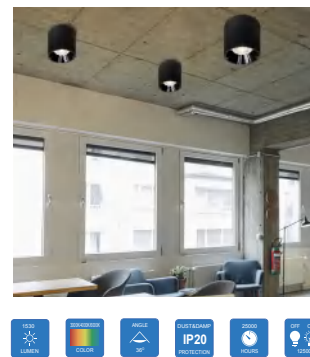

Features

Item	AS-D1218
Consumption	18W
LED type	SMD LED
Luminosity	1530lm
Colour temperature	3000K/4000K/6000K
Dimmable	Yes / no
Size	Ø120x110mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V, 50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.5
IP Class	IP20
Colours	White / Black

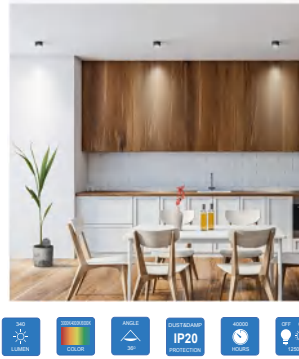

LED DOWN LIGHT



Features

Item	AS-D8004
Consumption	4W
LED type	SMD LED
Luminosity	340lm
Colour temperature	3000K/4000K/6000K
Dimmable	Yes / no
Size	Ø80x83mm
Lifespan	40000hrs
Voltage/frequency	AC 220-240V, 50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.4
IP Class	IP20
Colours	White / Black



Features

Item	AS-D7504R
Consumption	4W
LED type	SMD LED
Luminosity	340lm
Colour temperature	3000K/4000K/6000K
Dimmable	Yes / no
Size	Ø75x130mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V, 50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.4
IP Class	IP20
Colours	White / Black



Features


Item	AS-D7504S
Consumption	4W
LED type	SMD LED
Luminosity	340lm
Colour temperature	3000K/4000K/6000K
Dimmable	Yes / no
Size	75x75x140mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V, 50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.4
IP Class	IP20
Colours	White / Black



NEW PRODUCTS


Features

Item	ASWL-R1-A
Consumption	1xLED GU10 4W
Luminosity	1x340lm
Colour temperature	3000K/4500K/6500K
Dimmable	no
Size	75x105x90mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V,50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.4
IP Class	IP54
Material	ABS+PC
Color	White / Black



Features

Item	ASWL-S1-A
Consumption	1xLED GU10 4W
Luminosity	1x340lm
Colour temperature	3000K/4500K/6500K
Dimmable	no
Size	75x105x90mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V,50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.4
IP Class	IP54
Material	ABS+PC
Color	White / Black




Features

Item	ASWL-L1-A
Consumption	1xLED GU10 4W
Luminosity	1x340lm
Colour temperature	3000K/4500K/6500K
Dimmable	no
Size	75x85x170mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V,50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.4
IP Class	IP54
Material	ABS+PC
Color	White / Black



Features


Item	ASWL-L2-A
Consumption	1xLED GU10 4W
Luminosity	1x340lm
Colour temperature	3000K/4500K/6500K
Dimmable	no
Size	135x145x190mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V,50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.4
IP Class	IP54
Material	ABS+PC
Color	White / Black

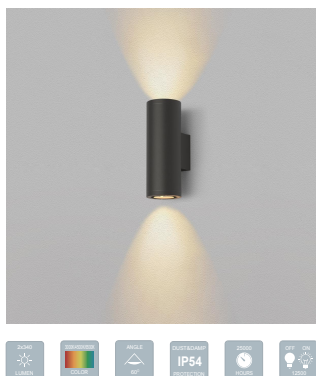

NEW PRODUCTS

Features

Item	ASWL-R1-D
Consumption	2xLED GU10 4W
Luminosity	2x340lm
Colour temperature	3000K/4500K/6500K
Dimmable	no
Size	75x105x170mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V,50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.4
IP Class	IP54
Material	ABS+PC
Color	White / Black

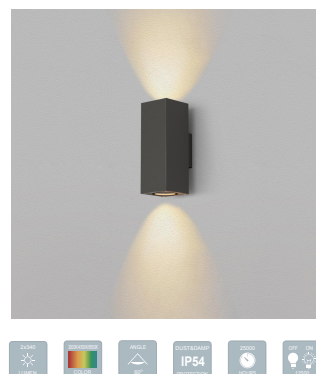


Features

Item	ASWL-S2-B
Consumption	2xLED GU10 4W
Luminosity	2x340lm
Colour temperature	3000K/4500K/6500K
Dimmable	no
Size	75x105x170mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V,50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.4
IP Class	IP54
Material	ABS+PC
Color	White / Black




Features

Item	ASWL-L2-D
Consumption	2xLED GU10 4W
Luminosity	2x340lm
Colour temperature	3000K/4500K/6500K
Dimmable	no
Size	85x130x180mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V,50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.4
IP Class	IP54
Material	ABS+PC
Color	White / Black

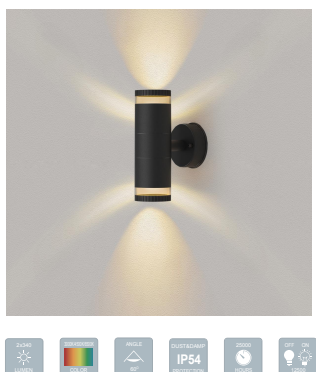

Features

Item	ASWL-F2-D
Consumption	2xLED GU10 4W
Luminosity	2x340lm
Colour temperature	3000K/4500K/6500K
Dimmable	no
Size	60x105x180mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V,50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.4
IP Class	IP54
Material	ABS+PC
Color	White / Black



NEW PRODUCTS

Features

Item	ASWL-T2-D
Consumption	2xLED GU10 4W
Luminosity	2x340lm
Colour temperature	3000K/4500K/6500K
Dimmable	no
Size	75x100x185mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V,50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.4
IP Class	IP54
Material	ABS+PC
Color	Withe / Black



Features

Item	ASWL-E2-D
Consumption	2xLED GU10 4W
Luminosity	2x340lm
Colour temperature	3000K/4500K/6500K
Dimmable	no
Size	38x64x230mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V,50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.4
IP Class	IP54
Material	ABS+PC
Color	Withe / Black



Features


Item	ASWL-K1-A
Consumption	1xLED GU10 4W
Luminosity	1x340lm
Colour temperature	3000K/4500K/6500K
Dimmable	no
Size	75x100x150mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V,50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.4
IP Class	IP54
Material	ABS+PC
Color	Withe / Black



Features


Item	ASWL-G1-A
Consumption	1xLED GU10 4W
Luminosity	1x340lm
Colour temperature	3000K/4500K/6500K
Dimmable	no
Size	80x130x150mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V,50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.4
IP Class	IP54
Material	ABS+PC
Color	Withe / Black

NEW PRODUCTS




Features

Item	ASCL-R1
Consumption	4W
Luminosity	340lm
Colour temperature	3000K/4500K/6500K
Dimmable	no
Size	60x60x195mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V,50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.4
IP Class	IP20
Material	Aluminum
Color	White / Black




Features

Item	ASCL-R2
Consumption	2x4W
Luminosity	2x340lm
Colour temperature	3000K/4500K/6500K
Dimmable	no
Size	150x150x145mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V,50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.4
IP Class	IP20
Material	Aluminum
Color	White / Black



Features

Item	ASCL-R3
Consumption	3x4W
Luminosity	3x340lm
Colour temperature	3000K/4500K/6500K
Dimmable	no
Size	150x150x145mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V,50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.4
IP Class	IP20
Material	Aluminum
Color	White / Black



Features

Item	ASCL-R4
Consumption	4x4W
Luminosity	4x340lm
Colour temperature	3000K/4500K/6500K
Dimmable	no
Size	150x150x145mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V,50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.4
IP Class	IP20
Material	Aluminum
Color	White / Black

NEW PRODUCTS



Features

Item	ASCL-S2
Consumption	2x4W
Luminosity	2x340lm
Colour temperature	3000K/4500K/6500K
Dimmable	no
Size	150x50x145mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V, 50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.4
IP Class	IP20
Material	Aluminum
Color	Withe / Black



Features

Item	ASCL-S3
Consumption	3x4W
Luminosity	3x340lm
Colour temperature	3000K/4500K/6500K
Dimmable	no
Size	200x50x145mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V, 50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80
Power Factor(PF)	>0.4
IP Class	IP20
Material	Aluminum
Color	Withe / Black



NEW PRODUCTS

Features

Item	AS-SG2210
Consumption	4W
Luminosity	340lm
Colour temperature	3000K/4500K/6500K
Dimmable	no
Size	H104×D38mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V,50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80 or >90
Power Factor(PF)	>0.5
IP Class	IP65
Material	Aluminum
Color	Black



Features

Item	AS-SG2211
Consumption	4W
Luminosity	340lm
Colour temperature	3000K/4500K/6500K
Dimmable	no
Size	H44×D38mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V,50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80 or >90
Power Factor(PF)	>0.5
IP Class	IP65
Material	Aluminum
Color	Black



Features

Item	AS-SG2212
Consumption	4W
Luminosity	340lm
Colour temperature	3000K/4500K/6500K
Dimmable	no
Size	H33×D38mm
Lifespan	25000hrs
Voltage/frequency	AC 220-240V,50/60Hz
Energy rating	F
Colour rendering index(Ra)	>80 or >90
Power Factor(PF)	>0.5
IP Class	IP65
Material	Aluminum
Color	Black